

WARNING TAPE REEL LIZARD

No. 223-AN

Surrounded by safety



ADVANCED FLUID MANAGEMENT SOLUTIONS



Tel: 090 998 9907

Eneid: inflo@vimet.com.vn - Web: www.thietbioto.vn

Email: info@vimet.com.vn - Web: www.thietbioto.vn







DESIGN IS





WARNING TAPE REEL

LIZARD




- AISI 304 stainless steel automatic hose guide suitable for potential corrosive atmospheres.
- Repeated spring stress-tests guarantee decades of life and efficiency.
- Speed control rewinding brake is available as accessory with specific P/N.
- Carabiner hook in aluminum as standard with the selected tape.
- White-red and yellow-black tapes available.
- Stopping pawl easy to remove for maintenance or when the work requires free sliding.
- Anti-shook technopolymer protecting cover.
- Fixing bracket that can be rotated up to 90° per side and with 2 slotted holes for safe, easy installation. The bracket can be locked in place with a screw, making the cable reel fixed.

TECHNICAL

Visit our website

CHARACTERISTICS



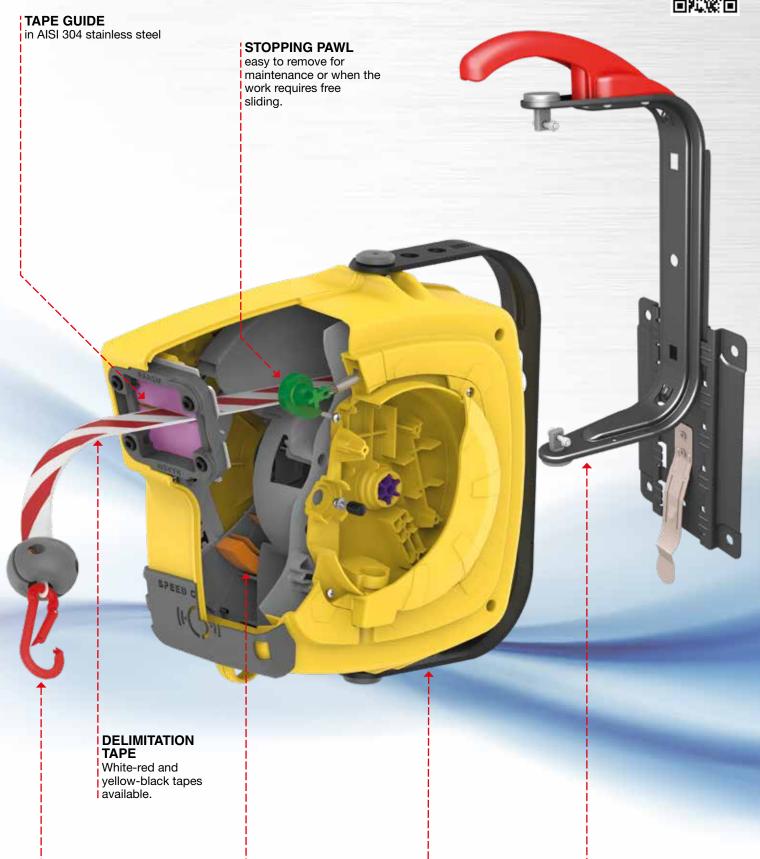

CARABINER HOOK

in aluminum.

SPRING Tested to withstand over 20000 work cycles.

Can be rotated up to 90° per side and has 2 slotted holes for safe, easy installation.

FIXING BRACKET

BAYONET BRACKET

Lets you quickly move the hose tape around the various workstations.




WARNING TAPE REEL "LIZARD" IN TECHNOPOLYMER S. 280

RAASM warning tape reels are the ideal solution for all those situations where it's necessary or mandatory to delimit the dangerous working areas both for the operators and the external people. There are many applications examples: fuel loading on tanks in service stations or goods and luggage unloading in airport. The warning tape reel is designed to satisfy the main RAASM quality characteristics in terms of structure and durability.





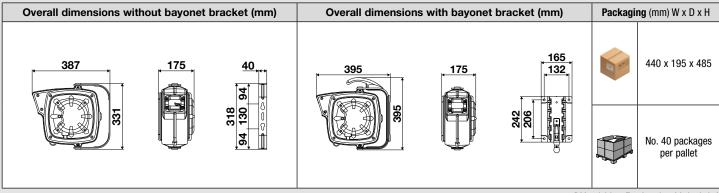

(W: width - D: depth - H: height)





P/N	Tape color	Length	Weight
92800.010	White - Red	16 m	5,7 kg
92800.020	Yellow - Black	16 m	5,7 kg

Overall dimensions of the delimitation tape	Width	Thickness	Length
	40 mm	1,5 mm	16 m



SPEED CONTROL

The versions listed below come with **clutch** so that tape rewinding can be performed at a controlled speed. They are marked by the **SPEED CONTROL** dataplate.

P/N	Tape color	Length	Weight
92840.010	White - Red	16 m	6,1 kg
92840.020	Yellow - Black	16 m	6,1 kg

Overall dimensions of the delimitation tape	Width	Thickness	Length
	40 mm	1,5 mm	16 m

RELATED ITEMS



P/N	Type of cable	Cable length
1064P	1 x 6 - PUR	14,5 m
1064PF	1 x 6 - PUR	14,5 m



P/N	Type of cable	Cable length
735131.60141	1 x 6 - PUR	14,5 m
735131.60261	1 x 6 - PUR	26 m

ACCESSORY FOR WARNING TAPE REEL

EXAMPLES OF WARNING TAPE REEL WITH ACCESSORIES

P/N **89003 Bayonet bracket, lets**you easily move the tape reel within the various workstations.









Technology

The research and development of cutting-edge solutions, carried out entirely **in Italy**, is the starting point for the entire production cycle.



Quality

Offering high-quality products is one of our main objectives. Specific and rigorous tests accompany every single stage of the production process.



Efficiency

RAASM offers a complete range of fluid management solutions suitable for many different sectors of use. Our success is founded on the ability to identify and satisfy the specific needs of our customers.







Company with an ISO 9001:2015 certified quality management system

RAASM S.p.A. 36022 S. ZENO DI CASSOLA (VI) Via Marangoni, 33 - ITALY

Export department

Tel. +39 0424 571130 - Fax +39 0424 571135

Technical department

Tel. +39 0424 571150 - Fax +39 0424 571155

info@raasm.com - www.raasm.com











WRV223AN-GB

Authorized dealer

All rights reserved by Raasm S.p.A.